




PD.1850

Response & Impedance Detail

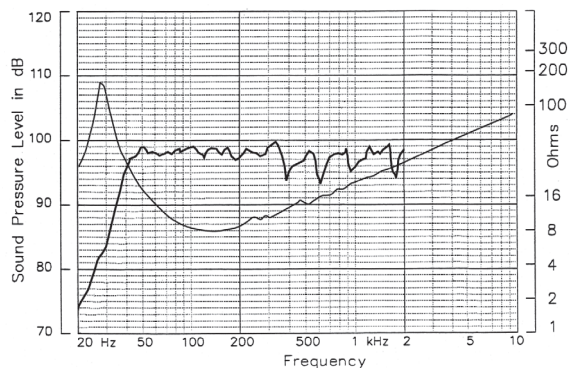

Response measured in a half space environment using a vented enclosure of 164 litres.

- Heavy duty 18" cast aluminium frame with extra wide flange for increased rigidity
- Sub Woofer
- Field replaceable magnet for touring applications
- 800W_{RMS}
- 5" copper voice coil assembly
- 170 oz. ceramic magnet
- Power compression only 1.6dB at rated power *1
- Distortion *2 2nd Harmonic <1%
3rd Harmonic <1%
- Advanced magnetic assembly incorporating a composite alloy and steel pole piece giving a uniform and stable magnetic field, improving linear excursion and providing an efficient thermal path to dissipate the heat produced by the voice coil
- A B/L in excess of 31T/m for fast accurate lows
- Double suspension system maintaining a pure piston action for the moving mass even when driven with the most complex programme input signals and provides additional durability against the rigours of life on the road

*1 Power compression is the reduction of sensitivity at the specified power. Higher power ratings do not necessarily give a proportionate increase in SPL, therefore the maximum SPL of the PD.1850 may significantly exceed that of other manufacturers with high published power ratings.
*2 Distortion is measured at 10% of the rated power (AES Standard)

Designed specifically to provide powerful and accurate bass frequencies with minimal distortion and power compression.

The PD.1850 is the superlative choice for top of the range sub bass systems where the ability to take punishment in the most demanding applications is the ultimate selection criterion.

Suitable for sound reinforcement in a variety of enclosure types since it allows enclosure designers considerably more freedom with specialised loading techniques without having to make allowances for physical characteristics or power handling limitations which are typically the result of more traditional designs.

Appropriate for applications as diverse as scoop bins, conventional reflex cabinets and horn loaded systems.

Specifications

Nominal Diameter	46cm (18")
Power rating ¹	800 Watts
Frequency range	35 - 2000 Hz
Nominal Impedance	4, 8 or 16 Ohms
Sensitivity ² (1 W 1 M)	98 dB
Highest Recommended Crossover ³	400 Hz
Resonance	30 Hz
Enc. Vol. Recommended	90 to 220 Litres
Effective Piston Diameter	382 mm (15.05")
Displacement limit (peak-peak)	34 mm
Voice coil diameter	127 mm (5")
Voice coil	Copper
Voice coil winding depth	28 mm (1.1")
Voice coil wire length	48.9M (160.5")
Magnet gap depth	12 mm (0.453")
Magnet material/mass	Ceramic/4.8 Kg (170 oz.)
Flux Density	1.18T
Cone/Surround	Paper/Fabric

Notes

1. AES Standard (35 to 350 Hz) Program 1600 Watts
2. Sensitivity is derived from the sine wave response between 50 - 350 Hz at 5W/2M using Zmin. It is then scaled to represent 1W/1M. It should be noted that not all manufacturers' sensitivity figures are based on this AES Recommended Practice.
3. In less demanding applications, the crossover point may be higher.

Thiele - Small Parameters

Fs	30 Hz
Revc	5.4 Ohms
Qts	0.21
Qms	6.04
Vas	249 Litres
Qes	0.22
Mms	216.4 grams
Sd	1150 sq cm
Cms	133 μM/N
BL	31.57 T/m
Xmax	11.05 mm
Vd	13 x 10 ⁻³ m ³
No	2.88%
Pmx	800 Watts

Notes

4. Thiele - Small Parameters follow a 800 Watt preconditioning period.

Mechanical Data

