MB 88 U - dynamic USB/XLR microphone

UK

- ✓ Special two-way microphone, USB and XLR both workable
- ✓ Compatible with any computer based DAW
- ✓ The extremely detailed sound reproduction makes it ideal for recording vocals, acoustic instruments and just about any other sound source
- ✓ High quality A/D convertor with 16 bit, 48 kHz sampling rate
- ✓ Solid die-cast construction

Caution!

- ▶ Never remove the screen holding the capsule, as this may damage the microphone!
- ▶ Never drop the mic, as this may cause severe damage!
- ▶ When the microphone is not in use, take it out of its clamp and put it in its case. Clean with damp cloth only.

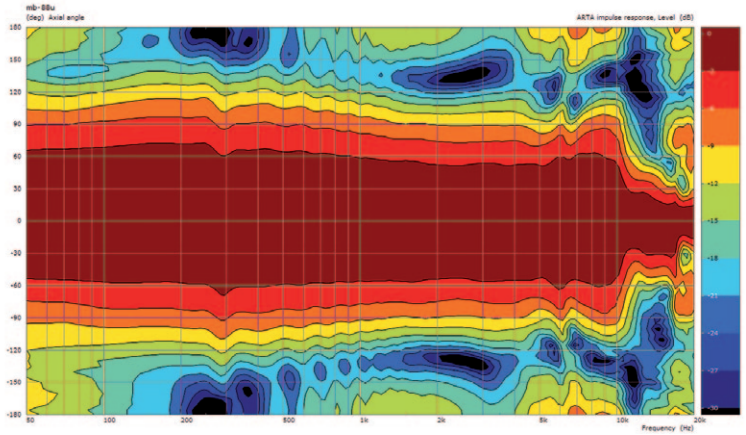

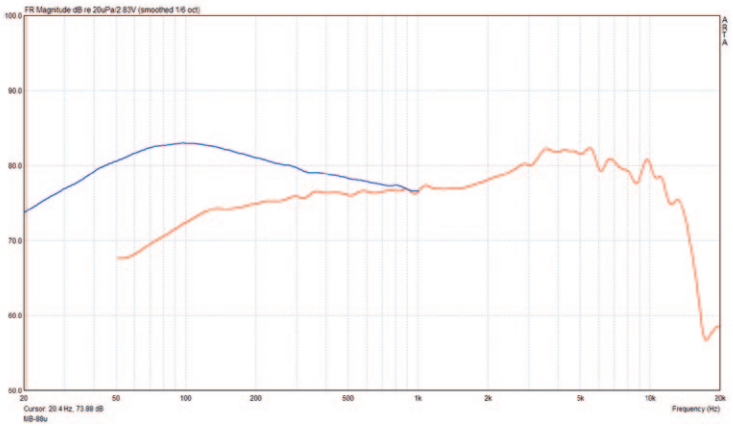

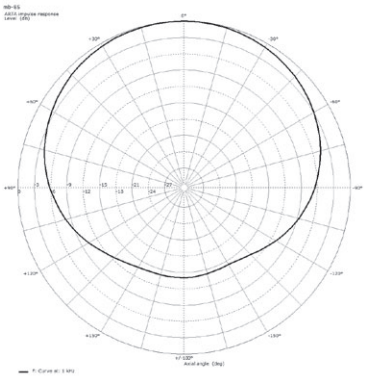

Polar pattern @ 1 kHz

Connection / Supply	XLR / USB
Transducer concept	dynamic
Directivity	super-cardioid
Field sensitivity [mV/ Pa]	2.1
Field sensitivity [dB re 1V/ Pa]	-53.8
Equivalent noise level [dB(A)]	13.3
Signal-to-noise ratio [dB(A)]	80.7
Maximum SPL [dB SPL @ 1% THD]	137
Electric impedance [ohm @ 1 kHz]	600
Frequency response 0.1 m -10 dB	20 - 16.000 Hz

Musikhaus Thomann e. K.
Treppendorf 30 • 96138 Burgebrach
Germany • www.thomann.de

the t.bone