

[www.elby-designs.com](http://www.elby-designs.com)



[www.be-mix.com](http://www.be-mix.com)




# **The Guide For BE-MIX System Of Remote Control**

## **Part 1 Configuring the System**

September 2009

# Main Form

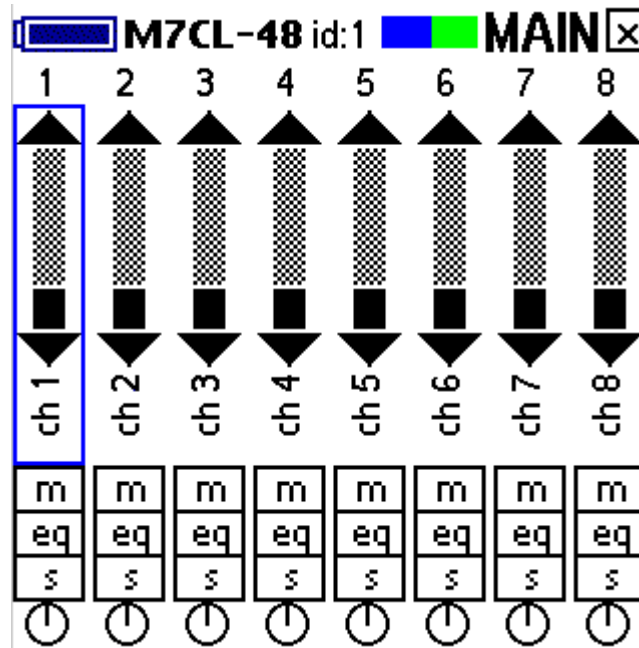

The main form consists of the top Infobar and a row of 8 channel strips.

The infobar consists of (left to right):

- 1) battery indicator;
- 2) current selected mixing desk indicator;
- 3) current selected desk ID indicator;
- 4) connection indicator;
- 5) current form name indicator;
- 6) the shortcut to close the application.

Each of the channel strips consist of (top to bottom):

- 1) channel number
- 2) volume fader
- 3) channel name
- 4) mute button
- 5) shortcut to Channel Edit View
- 6) solo button
- 7) pan button

The currently selected channel is highlighted by a rectangular frame – surrounding the channel number, the fader and the channel name.


# Main Form Shortcut List - Palm Treo/Centro




## Main Form Shortcut List - Palm Treo/Centro




# Main Form Shortcut List - Palm TX/Lifedrive

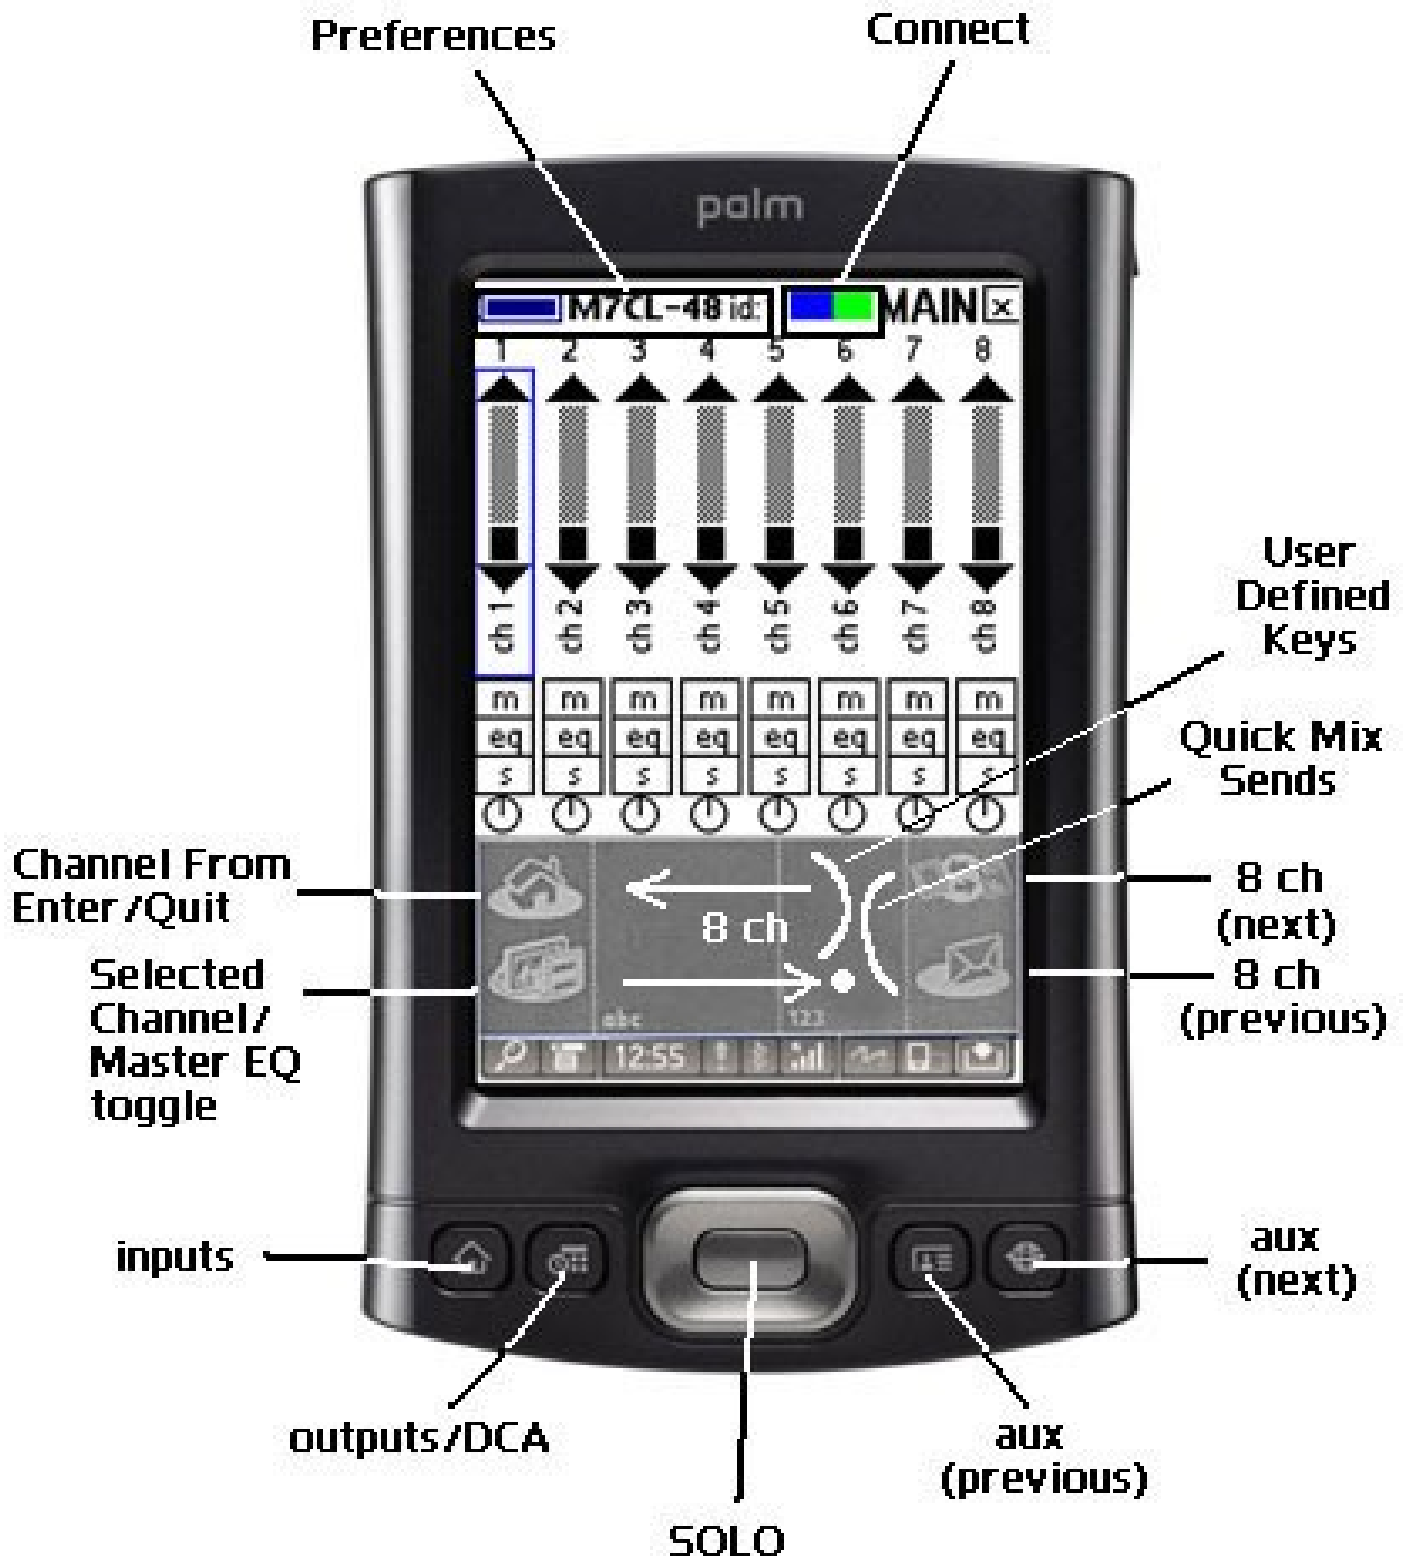


## Main Form Shortcut List - Palm TX/Lifedrive

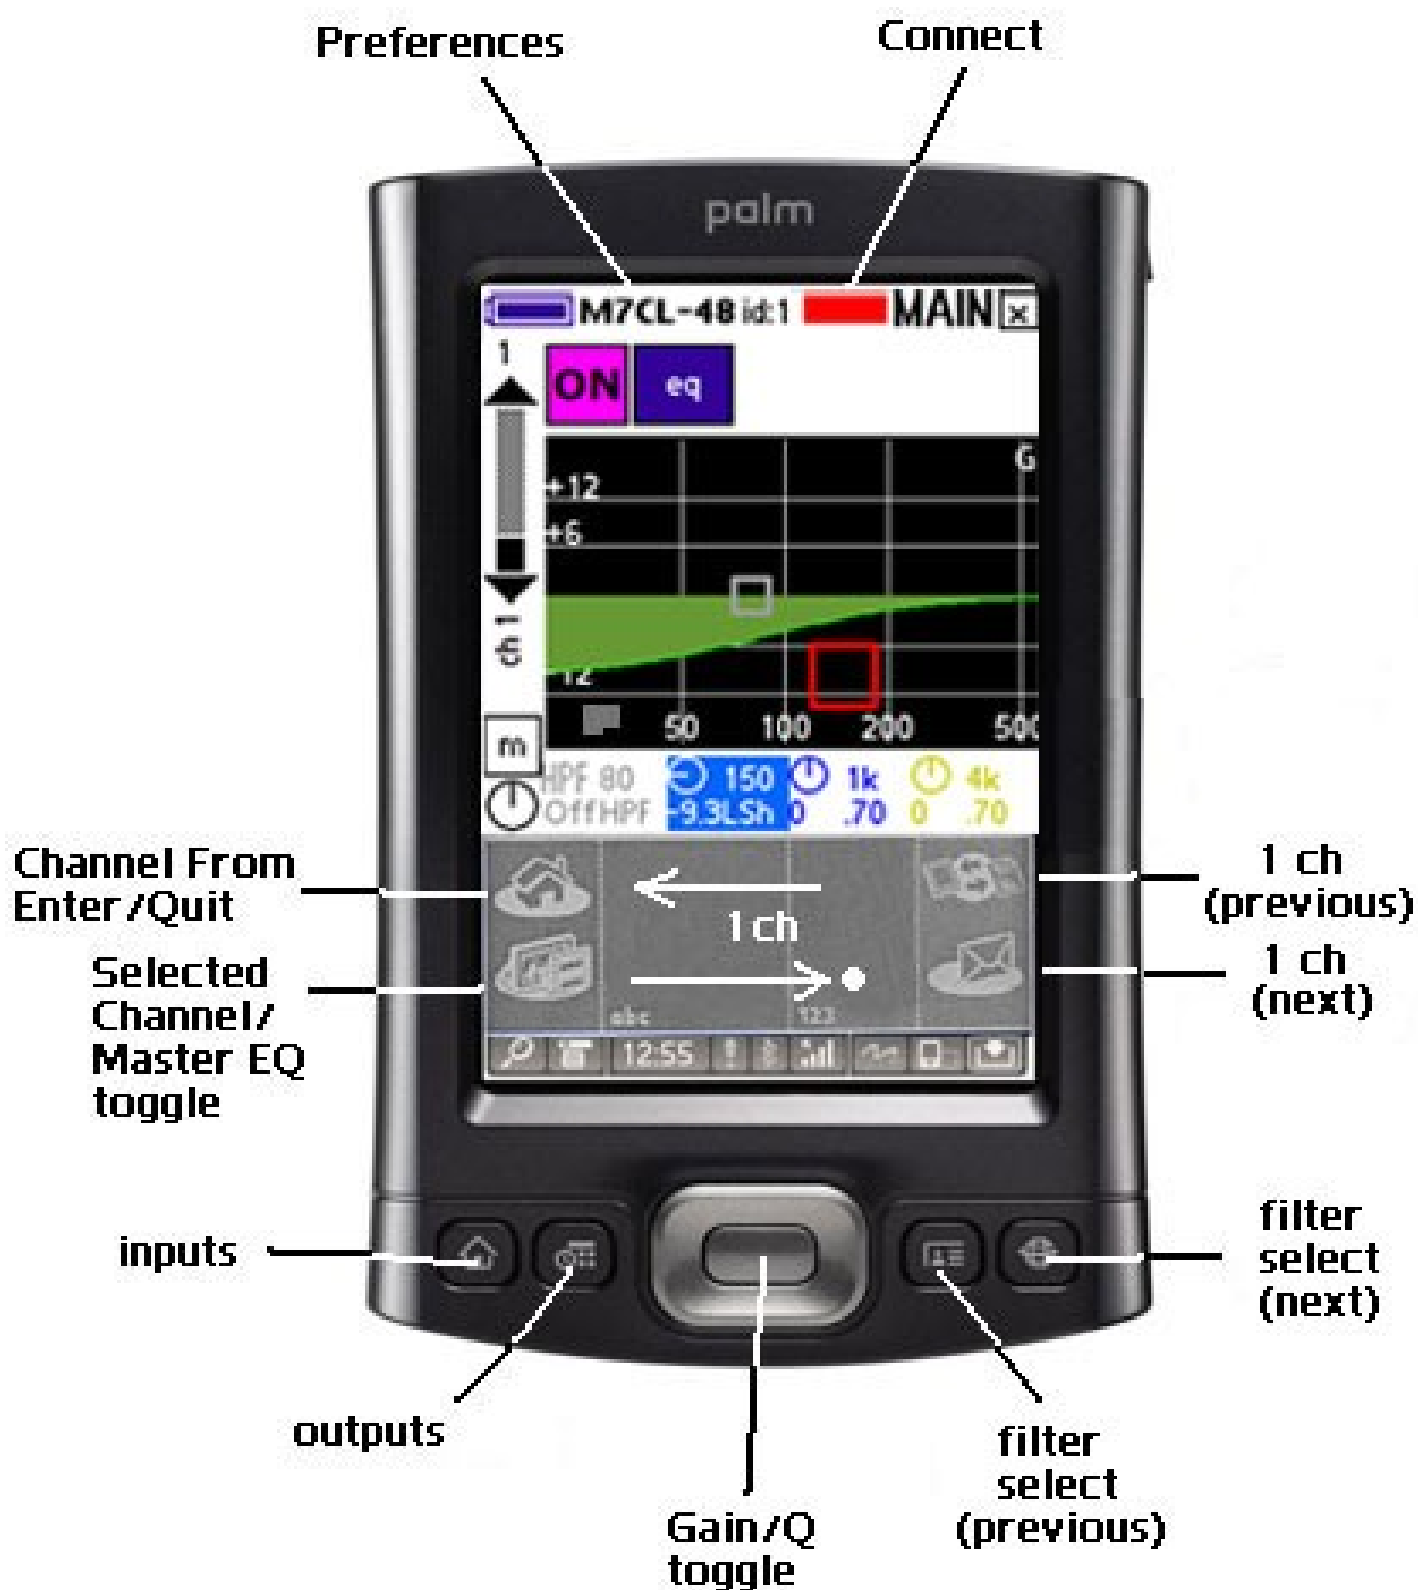

## PEQ Menu Access

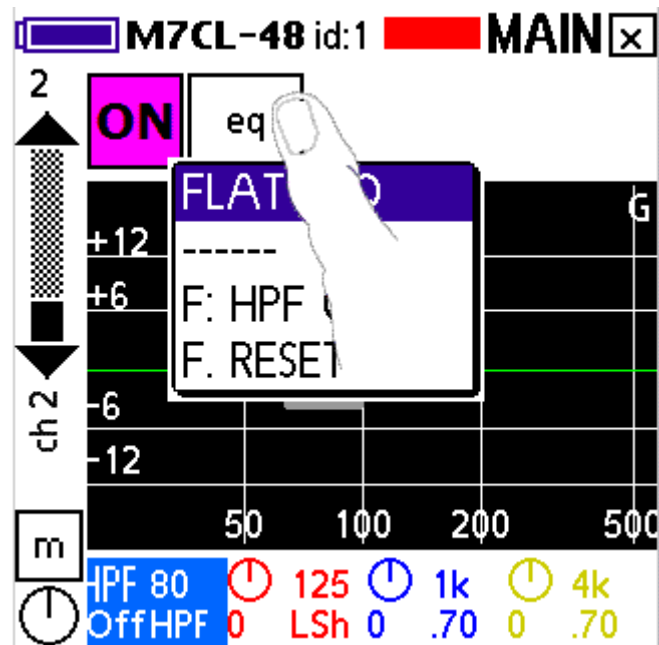

## GEQ Menu Access


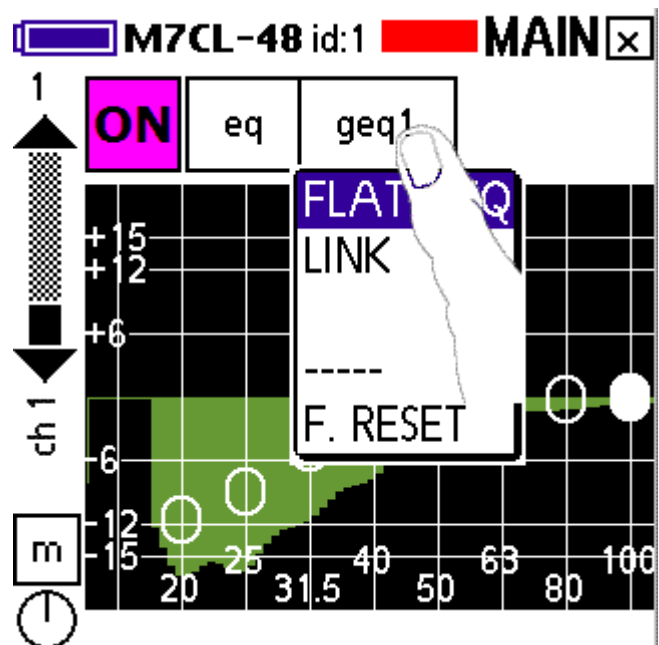


## Inserting GEQ

Go PREFERENCES/PPatch/Ins :

Toggle between Main/Outs to select to insert GEQ to Inputs/Outputs, respectively

Select the type of GEQ:

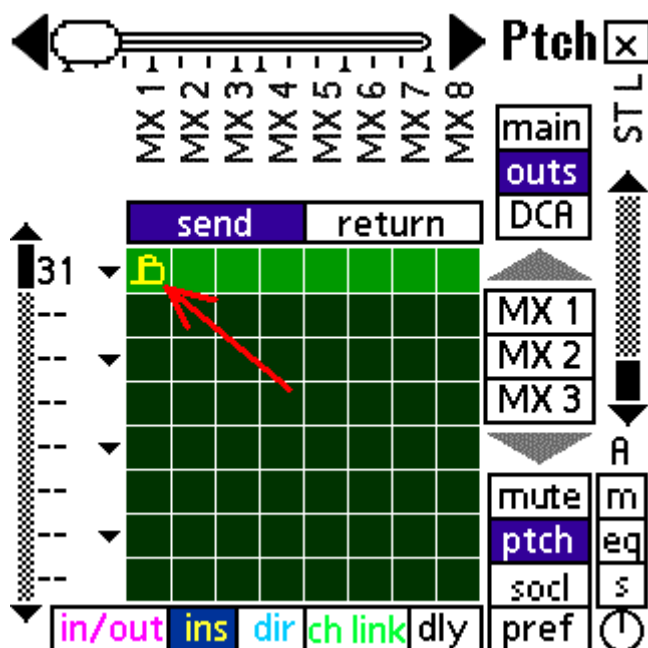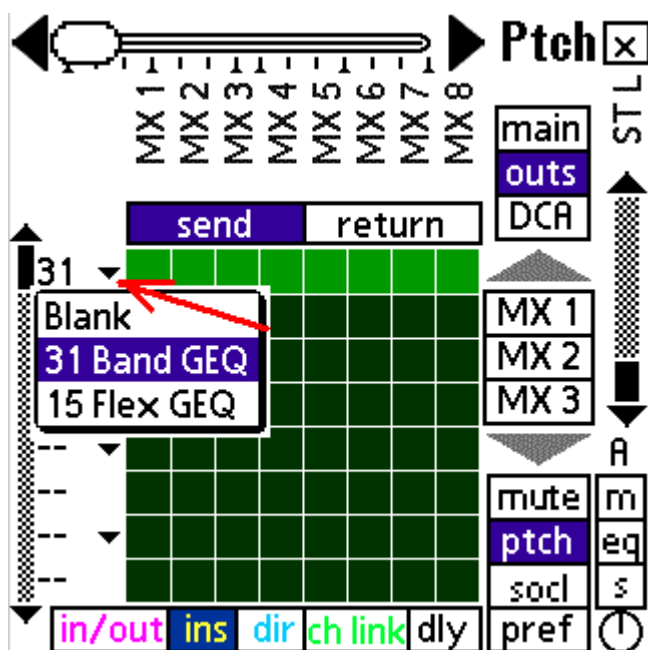

## M7CL/LS9 Output Delays

Go PREFERENCES/PATCH and then select DLY:

